



MagicPowerPad

Qi Wireless Charging Transmitter Pad

Part. No.: TM006



Compatible with all Qi-enabled smartphones. With the **Typhoon Wireless Charging Pad**, you can charge your phone without disconnecting/reconnecting cables to your handset every time you pick up your phone to use and put it back down to charge. Simply place your phone on the Wireless Charging Pad and it will begin charging. The LED indicator on the charging pad will turn green if your charging pad is power on, and will turn blue if your phone is charging effectively. The mobile charging pad requires that your device support wireless charging. **For Samsung Galaxy S 4, S 3, and Galaxy Note II**, make sure you have installed the **Wireless Charging Receiver** like TM007/TM018/TM019 to enable wireless charging on your device.



Simply place and charge



Features:

- » Enjoy easy, hassle-free charging without plugging wire and connector trouble
- » Smooth, ultra slim, light for saving space and easy handling
- » Smart charging with overcharge and overheating protection, care for your battery
- » Compatible with all Qi-enabled smartphones

Specifications:

| | |
|----------------------|-------------------|
| Input | 5 V / Max. 2 A |
| Output | Max. 5 W |
| Dimension | 163 × 88 × 9.5 mm |
| Weight | 115.5 g |
| DC Output Voltage | 5 V ± 5 % |
| Nonimal Output Power | 5 W |
| Ripple and Noise | 250 mVp-p |



Made in China



RoHS
compliant




* The specifications and pictures are subject to change without notice.
* All trade names referenced are the registered namework of their respective owners.



MagicPowerPad

Qi Wireless Charging Transmitter Pad

Part. No.: **TM006**

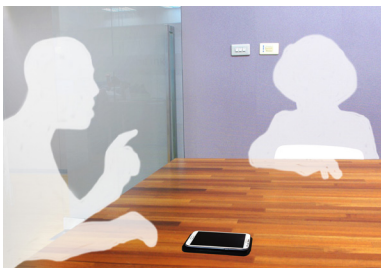

| | |
|-----------------------------|---|
| | At 20 MHz, and output parallel with 0.1 Uf & 10 Uf capacitors to ground Temperature at 25°C, at 5 Vdc input voltage |
| Average Efficiency | 73.1% minimum At 5 V input voltage and 1/4,1/2,3/4, full load |
| OVER-Temperature Protection | Maximum with auto-recovery function |
| Remark | Unless otherwise specification output load Must set CC mode. |

LED Light Definition:

| | |
|------------------------|---|
| Description LED Status | Green - Power is on, stand-by mode Blue - Charging |
|------------------------|---|

DC Input Voltage:

| Item | Minimum | Normal | Maximum |
|---------------|----------|---------|----------|
| Input Voltage | 4.75 Vdc | 5.0 Vdc | 5.25 Vdc |

Power Consumption:

| LOAD | Input Condition | Input Power Requirement |
|------|-----------------|-------------------------|
| 0 A | 5 Vdc | 0.5 W minimum |



Package Contents:

- » 1x MagicPowerPad - Wireless Charger
- » 1x USB Cable
- » 1x User Manual

Package Informations:

- » Packing Dimension: 215 x 110 x 40 mm
- » Packing Weight: 0.18 kg
- » Carton Dimension: 440 x 230 x 290 mm
- » Carton Q'ty: 20 pcs
- » Carton Weight: 5.5 kg



RoHS compliant



* The specifications and pictures are subject to change without notice.
*All trade names referenced are the registered namework of their respective owners.

Made in China